375 SERIES

Pull Action Latch Clamps | Dimensions

Features:

- Heavy duty U-hook style latch clamps are supplied with threaded U-hooks for easy adjustment
- Supplied patented thumb control lever for one handed operation
- DESTACO® Toggle Lock Plus™ versions available

Applications:

- Molding
- Closures for doors, lids, covers
- Assembly

Also Available:

- Clamps with longer hooks available Upon Request that are 25mm, 50mm, 100mm longer than standard length
- To order clamp with longer hook, add -M-25, -M-50, or -M-100 to the end of the model. Example: 375-M-50

Covered under one or more U.S./International Patents










375509 Cleat



385102 Optional Latch Plate for 375 and 375-R

Technical Information | Holding Capacities



Model	Max. Holding Capacity	Weight	EF:AF	Drawing Movement	Latch Plate	Replacement Hook Assembly	Hook Adj. Range
375	[4000 lbf] 17800 N	[2.94lb] 1,33kg	44:1	88,9 [3.50]	385102 (Optional)	375215	[0.81] 20,5
375-R		[3.0lb] 1,36kg					
375-В		[2.56lb] 1,16kg			375509 (Cleat Supplied)		
375-BR(i)		[2.62lb] 1,19kg					


1 This item is available upon request. **EF** = Exerting Force, **AF** = Applied Force

375, 375-R, 5-B, 375-BR SERIES

Pull Action Latch Clamps | Dimensions






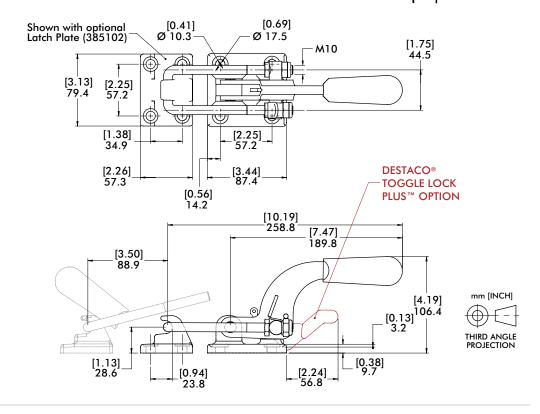





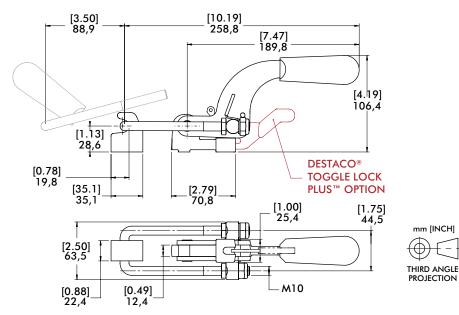

Replacement Hook Assembly	A	В	C	M
375215	[5.72] 145	50,8 [2.00]	[1.75] 44,5	M10 x 1.50

Hook assembly includes (2) jam nuts and (2) locknuts. Longer hook lengths available Upon Request. 375215-M-25, 375215-M-50, 375215-M-100

Replacement Thumb	Used on
Control Lever	Clamp Model
375-ZB1	375, 375-B 375-R, 375-BR



